



PIPE & INDUSTRIAL TOOLS


Operator's & Safety Manual



Pipe Cart

PN 2015

Pipe Cart

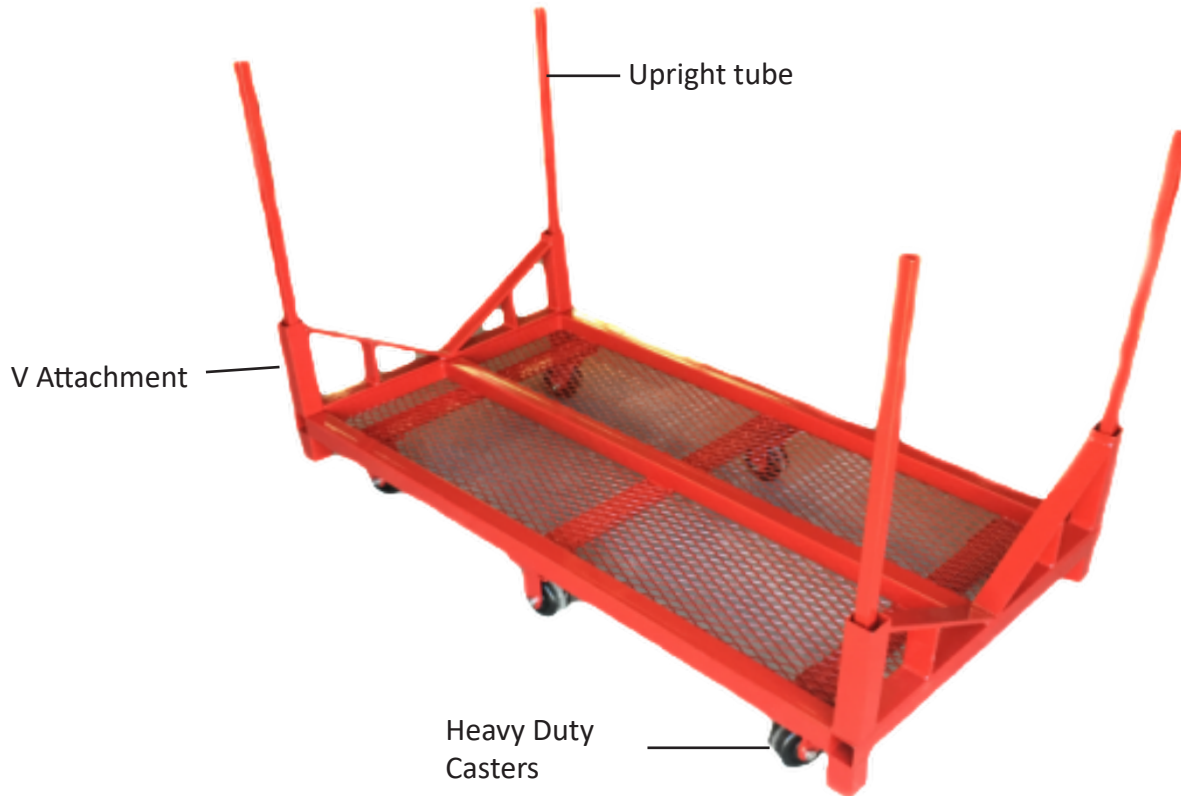

Specifications

Model Number - 2015

Width - 33"

Height (stowed) - 19.5"

Height (operating) - 44"

Length- 58.5"

Weight - 170 lbs.

Capacity - 2000 lbs.



PIPE & INDUSTRIAL TOOLS

Instructions Before You Begin Moving Load

1. **Do not misuse unit.** Never attempt to operate the equipment at more than the recommended capacity. Perform only the functions for which the Pipe Cart are designed.
2. **Keep alert.** Never horseplay around equipment and keep bystanders at a safe distance. Do not allow children to be in the work areas or operate Pipe Cart. Do not ride on Pipe Cart.
3. **Keep work area clean.** For unobstructed movement around the Pipe Cart, always keep floor in work area clear of clutter.
4. **Examine the equipment.** Prior to using B&B products, inspect all parts to ensure that they are in proper operating condition. Inspect Pipe Cart for metal deformation, bends or breaks.
5. **Wear proper personal protective equipment.** Welding helmet or hard hat, welding gloves and safety shoes should be worn as a precaution while operating this pipe cart.

Instructions for Use

Read and understand the instructions for safe performance. If uncertain about working with a B&B Pipe Cart, always contact B&B prior to use. Understand the correct operations, applications, and limitations. Store this safety manual in a clear area and always at a readily accessible site. Be especially aware of specific hazard signs. Extra copies are obtainable at B&B Pipe and Industrial Tools.

1. Check Pipe Cart capacity rating and make sure the Pipe Cart is not overloaded.
2. Check for damage before using. If damaged, remove from service and do not use.
3. Use on hard level surfaces.
4. Only use Pipe Cart for its intended purposes.
5. Inspect all assembly bolts prior to using Pipe Cart. Tighten if needed.
6. Keep Pipe Cart under control when transporting a load.
7. One length of pipe should be hauled at a time.
8. Examine the load to make certain it is properly secured prior to moving Pipe Cart.