



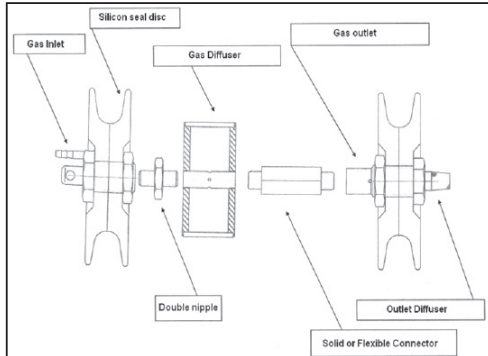

SPEC SHEET DOUBLE SEAL PURGE

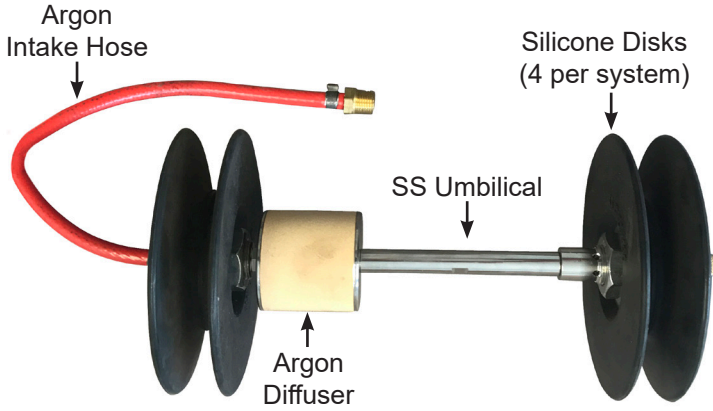

SPECIFICATIONS

- The Double Seal systems are made for ½" - 12" pipe.
- Typical purge times of less than 2 minutes (e.g. an 8" Pipe will purge to below 0.01% Oxygen in less than 2 minutes).
- High quality silicone sealing disks that prevent them from tilting or falling over inside the pipe guaranteed gas tight seal.
- UV and temperature resistant up to 626° F / 330° C continuously or 842° F / 450° C for short periods.
- Suitable for purging tube, pipe, elbows and fittings.
- The silicone seal units can be separated and used as a gas finger and pipe stopper respectively.
- Also sold in complete kits packaged in a briefcase for easy job-site transport and storage.



PN	Description
1076	0.629" - 0.748"
1077	0.748" - 0.944"
1078	0.944" - 1.141"
1079	1.141" - 1.338"
1080	1.338" - 1.496"
1081	1.496" - 1.692"
1082	1.692" - 1.889"
1083	1.850" - 2.086"
1084	2.047" - 2.283"
1085	2.519" - 2.834"
1086	3.070" - 3.385"
1087	3.543" - 3.976"
1088	3.937" - 4.409"

PN	Description
1089	4.724" - 5.118"
1090	4.881" - 5.433"
1091	5.669" - 6.102"
1092	5.905" - 6.496"
1093	7.755" - 8.110"
1094	8.228" - 8.661"
1095	9.685" - 10.118"
1096	10.236" - 11.023"
1097	11.417" - 12.598"
Double Seal Kits	Description
1098	Complete Kit 0.629" - 6.496"
1099	Complete Kit 0.629" - 8.661"
1100	Complete Kit 0.629" - 12.598"