





Pipe & Industrial Tools™

SPEC SHEET PRONTO PURGE SYSTEM

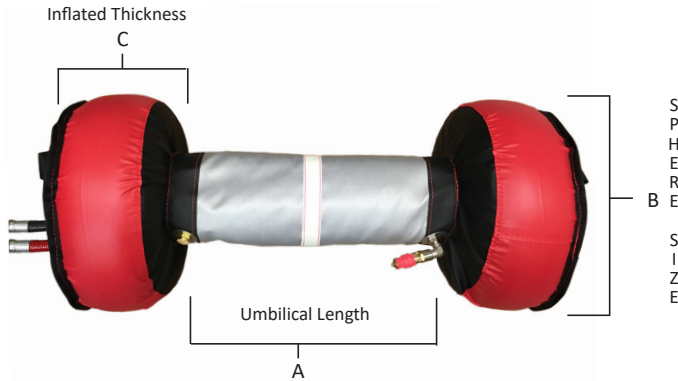

HOW IT WORKS: CREATE A SEAL, FILL THE CHAMBER WITH INERT GAS, MONITOR OXYGEN CONTENT, WELD.

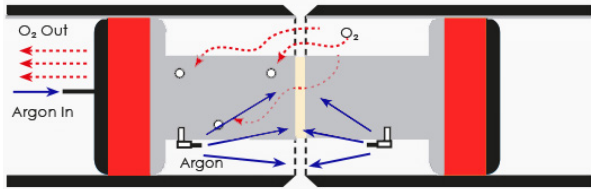

SPECIFICATIONS

- The unique “thru-bore” design of the central sleeve minimizes the area to be purged, dramatically reducing the volume of gas required.
- Friction free coatings allow easy movement through pipes from one joint to another, even around bends and elbows.
- Ready to use, connects to a dedicated and regulated gas supply. Choose any flow rate up to 20 LPM through the twin preset purge valve.
- A central (glow in the dark) strip allows fast and accurate alignment of the system to the center point of the weld area.
- The inflatable dams and umbilical hose are covered with a heat resistant material and insulated accordingly for use at temperatures up to 482°f/250°c.

Description	Part Number	Umbilical Length (A)	Sphere Size (B)	Inflated Thickness (C)
Pronto Purge System - 8"	1025	13"	9 ¼"	4"
Pronto Purge System - 10"	1026	11 ½"	11 ½"	4"
Pronto Purge System - 12"	1027	11 ½"	14"	4"
Pronto Purge System - 14"	1028	12"	15 ½"	3 ½"
Pronto Purge System - 16"	1029	13"	16"	3 ¼"
Pronto Purge System - 18"	1030	16"	18"	3 ½"
Pronto Purge System - 20"	1031	17"	20"	5 ¼"
Pronto Purge System - 22"	1032	16 ¾"	22"	5"
Pronto Purge System - 24"	1033	18"	24"	5 ½"
Pronto Purge System - 26"	1034	22 ⅞"	26"	5 ¾"
Pronto Purge System - 28"	1035	22 ⅞"	28"	5 ¾"
Pronto Purge System - 30"	1036	22 ⅞"	30"	5 ¾"
Pronto Purge System - 32"	1037	24"	32"	5"
Pronto Purge System - 34"	1038	24"	34"	6"
Pronto Purge System - 36"	1039	24"	36"	7"
Pronto Purge System - 40"	1040	24"	40"	7 ¼"
Pronto Purge System - 42"	1041	24"	42"	7"
Pronto Purge System - 48"	1042	23 ¾"	48"	7 ¼"